

4




3

2

1

THIS DRAWING UNPUBLISHED. RELEASED FOR PUBUCATION

LOC	DIST	REVISIONS					
---	---	P	LTR	---	DATE	DWN	APVD

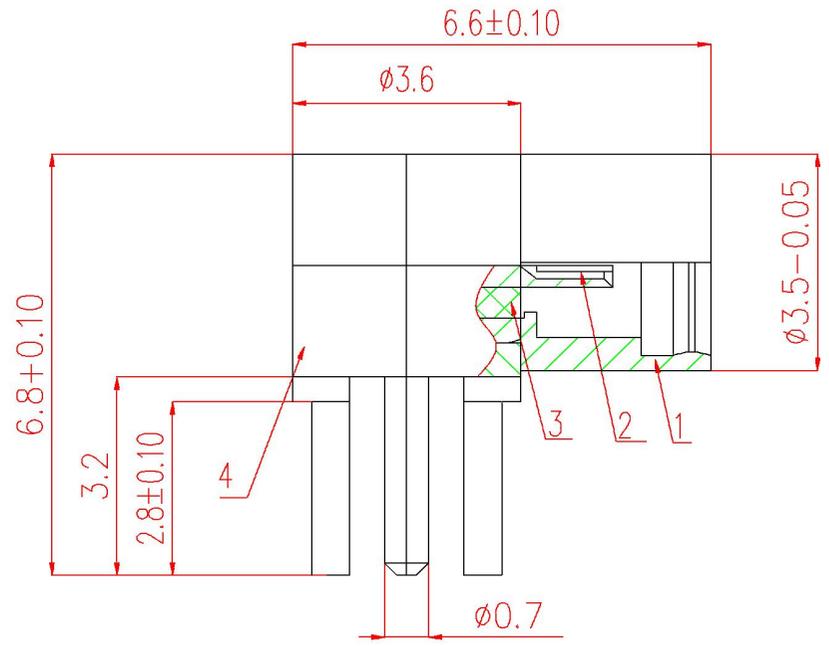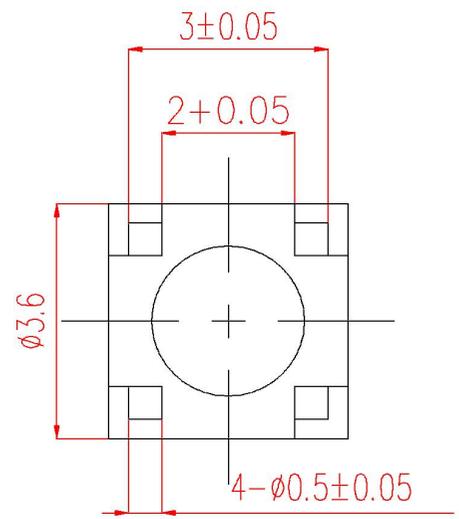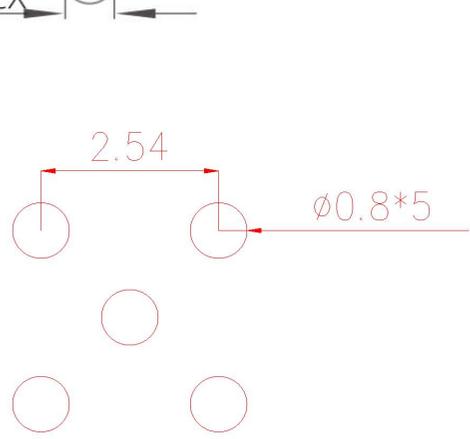

- NOTES:
- ELECTRICAL:
 - IMPEDANCE: 50Ω
 - INSULATION RESISTANCE: 5000M Ω
 - FREQUENCY RANGE: DC-6 GHz
 - DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
 - VSWR: ≤1.20:1
 - INSERTION LOSS: 0.25dB (MAX)

- ENVIRONMENTAL:
 - TEMPERATURE RANGE: -55° to +125°

- MATERIAL AND FINISH:
 - INNER CONDUCTOR MATERIAL: BERYLLIUM BRONZE GOLD PLATING
 - INSULATOR: PTFE
 - EXTERNAL CONDUCTOR MATERIAL: BRASS GOLD PLATING

MODEL	1	2	3	4
XQY-MMCXKWE-TB	BRASS	BERYLLIUM BRONZE	PTFE	BRASS
	GOLD PLATING	GOLD PLATING	/	GOLD PLATING
Accept custom sizes and styles				

THIS DRAWING IS A CONTROLLED DOCUMENT		21/10/2021		Shenzhen xinqiyuan Technology Co., Ltd.	
		CHK			
DIMENSIONSMM		TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.1 Note: Dimensions (mm / [inch])		NAME MMCX Female RF Coaxial Connector Printed circuit board	
		APVD		SIZE A4	
		APPLICATION SPEC		CAGE CODE 01021	
		WEIGHT		DRAWING NO XQY-MMCXKWE-TB	

4

3

2

1