

4



3

2

1

THIS DRAWING UNPUBLISHED.	RELEASED FOR PUBUCATION
---------------------------	-------------------------

LOC	DIST	REVISIONS					
---	---	P	LTR	---	DATE	DWN	APVD

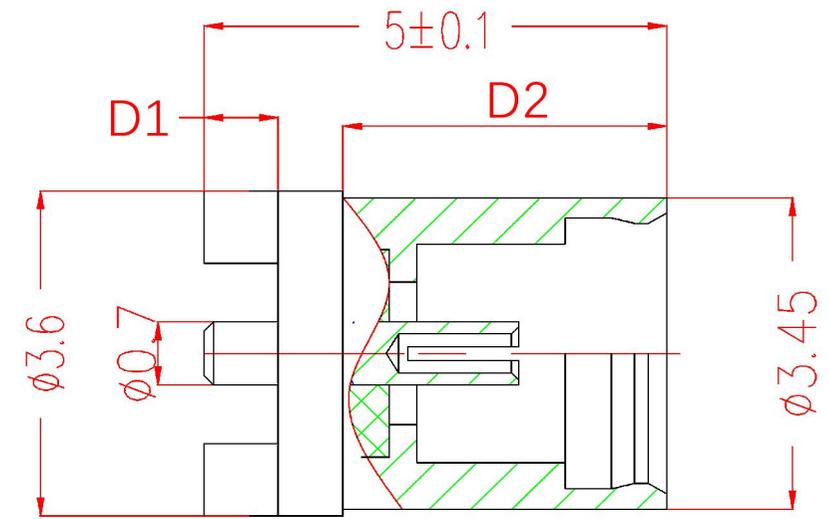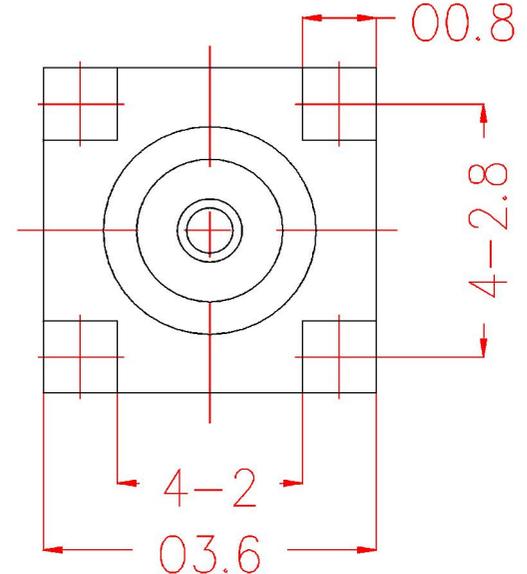

NOTES:

- 1.ELECTRICAL:
 - 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE:5000M Ω
 - 1.3 FREQUENCY RANGE: DC-6 GHz
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
 - 1.5 VSWR: ≤1.20:1
 - 1.6 INSERTION LOSS: 0.25dB (MAX)

- 2.ENVIRONMENTAL:
 - 2.1 TEMPERATURE RANGE: -55° to +125°

- 3.MATERIAL AND FINISH:
 - 3.1 INNER CONDUCTOR MATERIAL: BERYLLIUM BRONZE GOLD PLATING
 - 3.2 INSULATOR: PTFE
 - 3.3 EXTERNAL CONDUCTOR MATERIAL: BRASS GOLD PLATING

MODEL	D1	D2		
XQY-MMCXKET-TB	0.8mm/0.031"	3.5mm/0.137"		
XQY-MMCXKET8-TB	0.8mm/0.031"	3.5mm/0.137"		
XQY-MMCXKET6-TB	0.6mm/0.023"	3.6mm/0.141"		
Accept custom sizes and styles				

THIS DRAWING IS A CONTROLLED DOCUMENT		21/10/2021		Shenzhen xinqiyuan Technology Co., Ltd.		
		CHK				
DIMENSIONSMM		TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.1 Note: Dimensions (mm / [inch])		NAME MMCX Female RF Coaxial Connector Printed circuit board		
				APVD ---		SIZE A4
		APPLICATION SPEC ---		CAGE CODE 01021		
		WEIGHT ---		DRAWING NO XQY-MMCXKET-TB		

4

3

2

1